

EPH2400-984RD

Installation, Programming & Operations Manual



Note that Telco lines and some PBX system only provide a limited amount of time to program the phone before the line tells the phone to hang up. See the back page for a programming template and tips to assist in programming the phone in these situations.

STEP 1 - Plug the phone line from phone into the phone jack

STEP 2 - Program Emergency Numbers

A. Press the RED **ON/OFF Key**, then slide **S15** to ON/PROG (See Photo)


B. To Program first Emergency Number: Press **1, ***, (key in the phone number), Press the **VOL Key**

STEP 3 - Program Auto Answer

A. Press **8, *, (1 or 2)**
(Auto Answer 1=ON, 2=OFF)

STEP 4 - End Programming

A. Slide **S15** to **1** and press the RED **ON/OFF Key**.

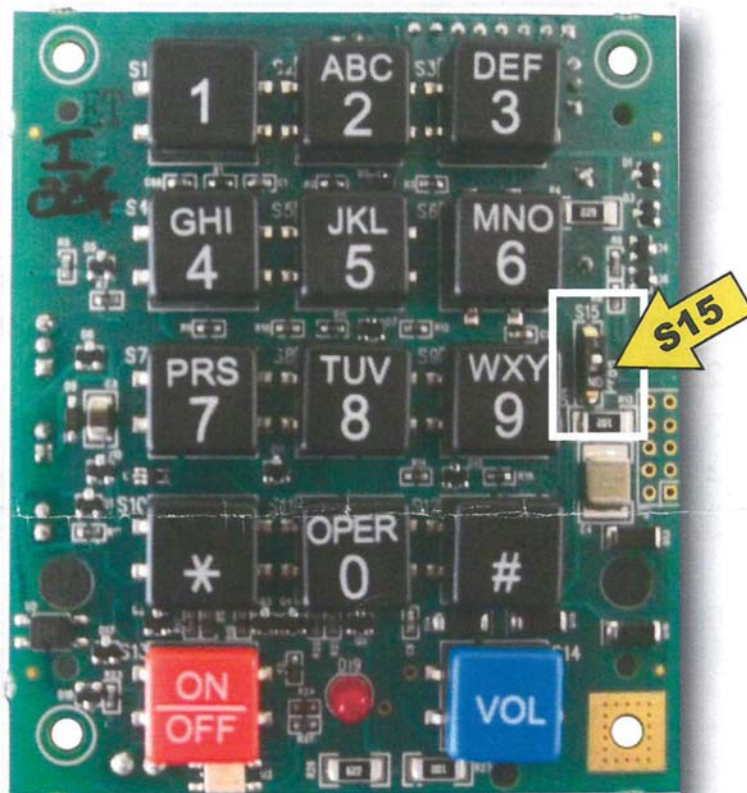

	42 Central Drive Farmingdale, NY 11735-1202 Phone: 631-777-5500 Fax: 631-777-5599
--	--

Copyright© 2017
Alpha Communications® All Rights Reserved

If the phone turns off during programming, it is because many Telco lines and PBX systems provide a limited amount of time to program the phone. In these cases, it is imperative to quickly move through the phone programming. A template is offered below to assist in programming the first emergency button.

TIP 1 - To program a phone where multiple numbers or auto answer is to be programmed, follow steps:

- A. Press the red ON/OFF key, then dial a number such as your cell phone. Answer your cell phone and do not hang up the call.
- B. Slide S15 to ON/Prog.
- C. Perform all of the steps on page 1.
- D. When programming is completed, make sure to slide S15 to 1.
- E. Press ON/OFF key to hang up the call to your cell phone.

PROGRAMMING TEMPLATE

1. Fill in the emergency phone number in the spaces provided in step 2.
2. Then follow the directions provided in step 1.

Step 1. Press the red ON/OFF key, then slide S15 to ON/Prog

Step 2. Press 1, *, _____, VOL Key