


**NOTES:**  
 All Wiring #22AWG unless shown otherwise.  
 Maximum of 10 Monitors per line (M1, M2, M3).  
 \* Install a 75 ohm end-of-line resistor at the last monitor in the coaxial cable line.  
 Observe all local electrical codes.

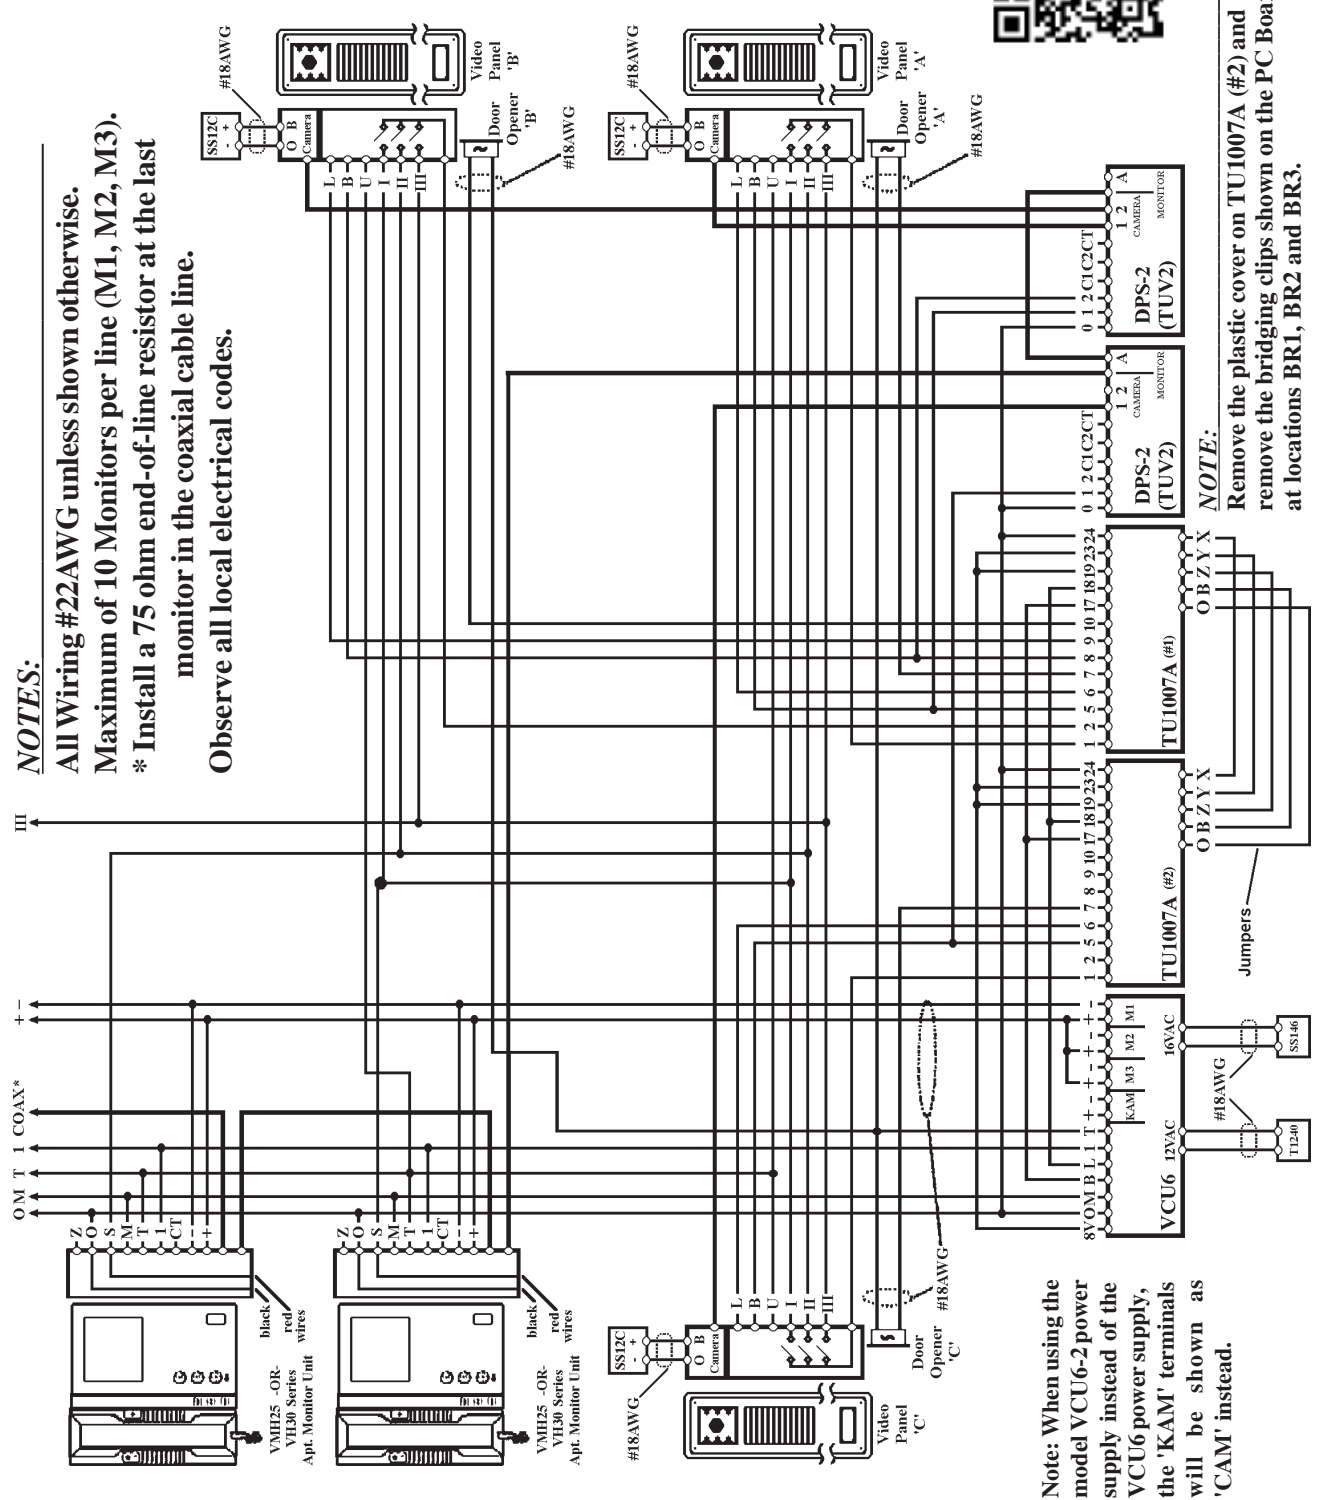

Note: When using the model VCU6-2 power supply instead of the VCU6 power supply, the 'KAM' terminals will be shown as 'CAM' instead.

**NOTE:**  
 Remove the plastic cover on TU1007A (#2) and remove the bridging clips shown on the PC Board at locations BR1, BR2 and BR3.

**Alpha COMMUNICATIONS**

42 Central Drive, Farmingdale NY 11735-1202  
 (631) 777-5500 Fax: (631) 777-5599  
**TOLL-FREE Technical Line 1-800-666-4800**  
 Email: info@alphacommunications.com

**Typical Wiring Diagram for the S.T.R™ Video-Intercom System with up to Three (3) Entrance Video Panels and One (1) Video Monitor Riser (no video distributor)**