



RCC2500 Series Command Center Station (10 station capacity shown)

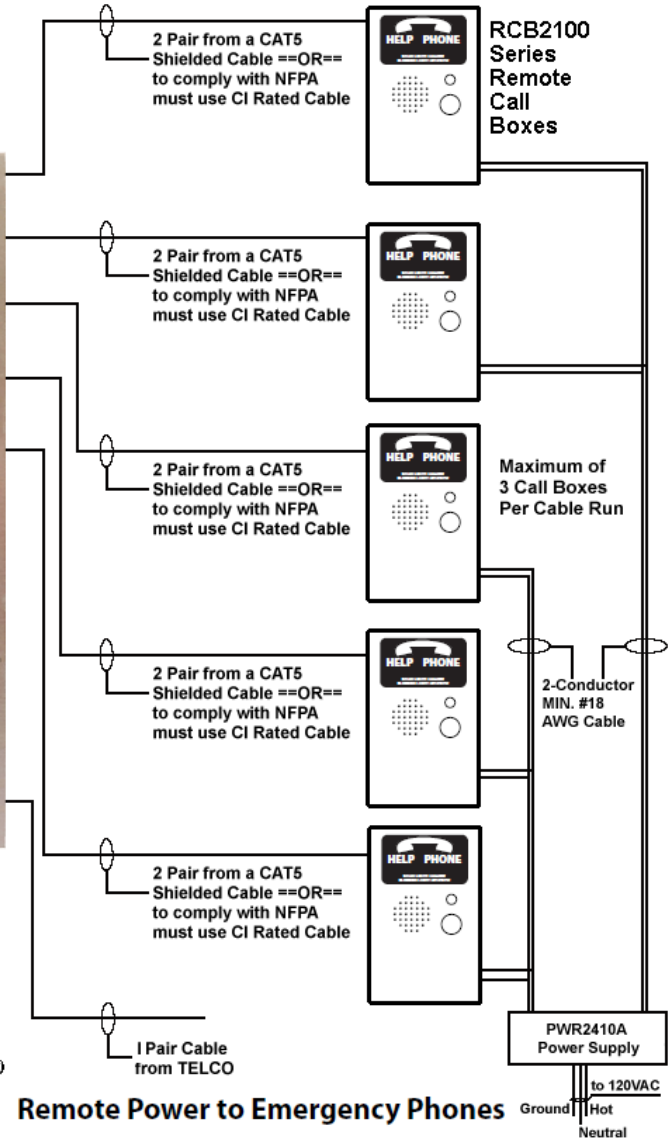

(Master shown less
coiled cord)



NOTES:

1. Up to 10 of the RCB2100 Series Refuge Call Boxes can be powered from a single PWR2410A / PWR2410 Power Supply.
2. Terminal connections shown may not be in the actual order they appear on the equipment.
3. When installing observe all national and local electrical and building codes.
4. Shielded CAT5 cable should be used to minimize any potential electrical or radio interference, BUT to comply with NFPA codes CI Rated Cable must be used instead (model# 2PRJS/328 or 2PRJS/984).

alpha
COMMUNICATIONS®

42 Central Drive, Farmingdale NY 11735-1202
(631) 777-5500 Fax: (631) 777-5599
TOLL-FREE Technical Line 1-800-666-4800
Email: info@alphacommunications.com

Typical Block Wiring Diagram for the
AlphaRefuge™ 2100 Series Area of Refuge
System with up to 10 of the (24V type)
RCB2100 Series Refuge Call Boxes (5 shown)