


- ! NOTES-
- ! 1. ALL WIRING MUST BE MINIMUM #18AWG UNLESS SHOWN OTHERWISE.
 - ! 2. SEE SYSTEM WIRING DIAGRAM FOR BALANCE OF SYSTEM WIRING.
 - ! 3. MAXIMUM RELAY CONTACT RATING 1.0 AMP.

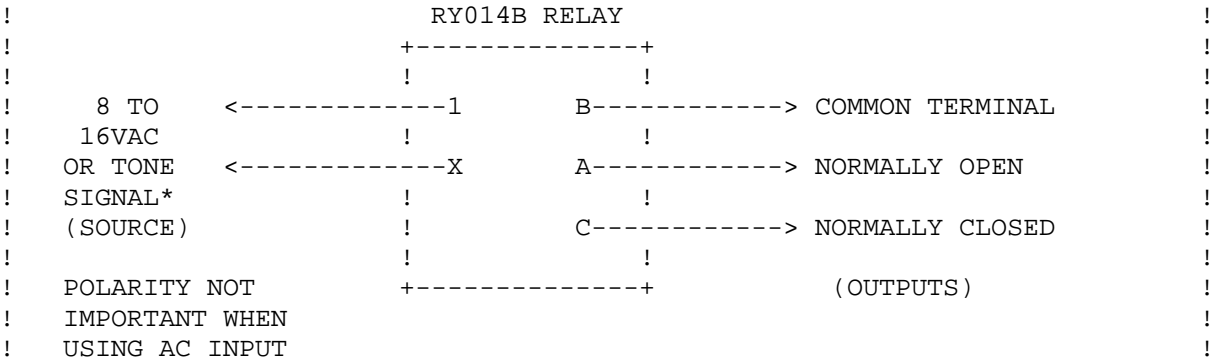

! *NOTE: WHEN TRIGGERING THE RY014B FROM A TONE SIGNAL, SUCH AS THE
! TONE SIGNAL FROM A PK543 AMPLIFIER, THE RY014B WILL NOT
! ACTIVATE IF THERE IS MORE THAN ONE (1) APT. INTERCOM
! STATION CONNECTED IN PARALLEL.